

TW10 522

Rüeger Bar-Stock Thermowell with flanged process connection.
Conical execution in accordance with DIN 43772 Form 4F.

Applications


- Petro / Chemical Industry.
- Power stations, including Oil & Gas
- Painting & coating installations.
- Pulp & Paper
- Steel & General Industry

Description

- Conical thermowell with flange (for S10).
- Drilled bar-stock thermowell.
- Welded flange, acc. to EN/DIN standards.
- Form 4F acc. to DIN 43772.
- For high pressures, fluid speeds and T°.
- Mounting on pipes and vessels.

Options:

- Stress calculation acc. to ASME/ANSI PTC 19.3
- Hydraulic static pressure test (OD / ID).
- Dye penetrant test.
- Radiographic examination of the welding.
- Material certificates EN 10204 3.1B or 3.1C
- NACE MR 0175 hardness certificate

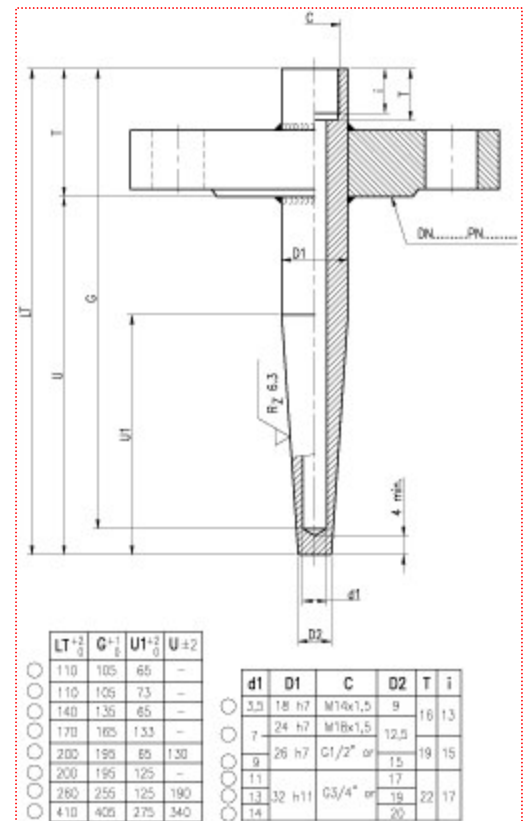

Your Rüeger partner for Belgium & GDLux.

SensoFlow Vof/Snc

Maasdal,11 B-1500 HALLE • TEL +32(0)2 3050058 • FAX +32(0)2 3050058
TVA/BTW BE 0890 389 526 • Bank CBC 732-0150503-10
IBAN BE41 7320 1505 0310 BIC : CREGBEBB
Internet : www.sensoflow.be